

## **SPECIFICATION SHEET**

Web site: www.marinco.com Phone: 800-307-6702

Date: July, 2011 Rev: 01

Connector, Locking 30A, 250V 3-Pole, 4-Wire

## Catalog Number: 3015C

Item: Connector, locking

Rating: 30 amperes, 250 volts 3-phase

Configuration: NEMA L15-30R

Materials: Housing and connector body are nylon with CTI greater than 600 volts.

Terminals: Clamp-type, with color-coded brass terminal screws, 10-32.

Contacts: Line contacts are one piece, .040" thick brass.

Cord Clamp: Internal, with removable insert to accommodate cable from .465" (12/4 SJ)

through 1.050" (8/4 S).

Overall Design: Two assembly screws, U-drive style.

All screws are combination slot/cross-head.


Dust seal at cord entry.

Beveled housing.

Certifications: UL listed, File E57672

CSA certified, File LR81290

## Dimensions:

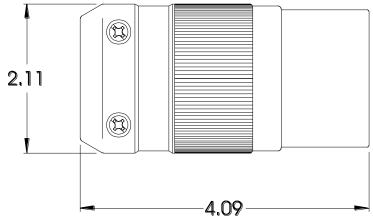



Dimensions shown in inches